


## EM-560D Electro Magnetic Lock

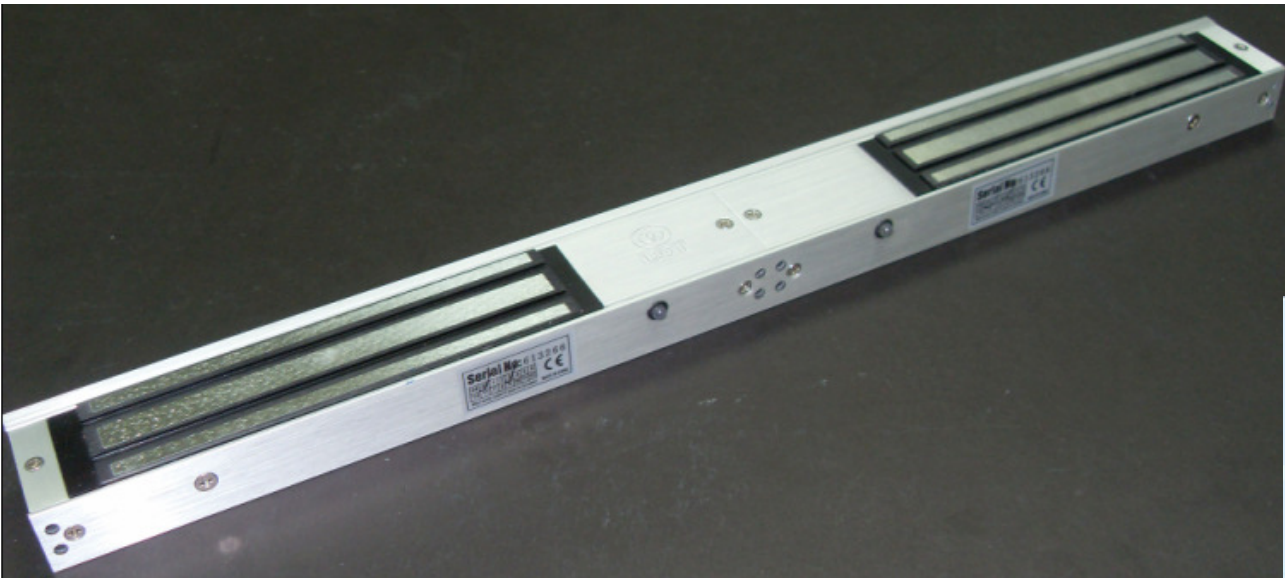

### Technical Specifications :

<b>Dimensions:</b>	500L x 42W x 25H (mm)
<b>Armature Plate:</b>	180L x 38W x 11H (mm)
<b>Holding Force:</b>	280kgs x 2 (600Lbs x 2)
<b>Voltage:</b>	12/24VDC $\pm$ 10%
<b>Current Draw:</b>	12V/500mA x 2, 24V/250mA x 2
<b>Suitable For:</b>	Wooden Door, Glass Door, Metal Door, Fireproof Door
<b>Door Status Sensor:</b>	(NO/ NC/ COM)
<b>LED Indication:</b>	Green – Door Lock ; Red – Door Unlock
<b>Surface Temp:</b>	$\leq$ +20°C
<b>Operating Temp:</b>	10~+55°C (14-131F)
<b>Suitable Humidity:</b>	0~90% (Non-condensing)
<b>Material For Shell:</b>	Anodized Aluminium
<b>Material For Magnetic:</b>	Zinc
<b>Material For Armature:</b>	Zinc
<b>Weight:</b>	4kgs
<b>Optional Bracket:</b>	LBK-560U, LBK560L, LBK-560Z